

TECHNICAL SPECIFICATIONS

FLOOD BARRIERS

JACKBOX™ 2727



UNIT	HEIGHT	WIDTH	LENGTH
JB2727	27" (0.69m)	27" (0.69m)	20' (6.1m)


A polypropylene unit for use as a flood barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. These units contain a continuous impermeable front sheet which reduces seepage to a minimum. Each cell is easily removed post flood to reduce recovery and clean-up costs. A complete unit is fitted with a lid to minimize fill wash-out during waves and over-topping.

Unit successfully tested to full protocol at US Army Corps of Engineers, Engineer Research & Development Centre (ERDC).

GENERAL SPECIFICATIONS

Linked, heavy-duty, woven polypropylene cells, fitted with an impermeable woven polypropylene coated continuous front face and lid. Individual cells fitted with four lifting loops for ease of rapid recovery and minimum clean-up during the recovery phase.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.



PACKAGING AND TRANSPORT INFORMATION

FLAT-PACKED INDIVIDUAL UNIT DIMENSIONS & WEIGHTS

HEIGHT	WIDTH	LENGTH	WEIGHT
11" (0.28m)	2'7" (0.79m)	2'7" (0.79m)	46 lb (21kg)


PALLET INFORMATION

PER PACK	HEIGHT	WIDTH	LENGTH	WEIGHT
2 units	1'9" (0.54m)	2'7" (0.79m)	2'7" (0.79m)	97 lb (44kg)

TRANSPORT INFORMATION

TYPE	PACK	UNITS	DEPLOYED LENGTH
13.5 Trailer	112	224	4,480' (1,365m)
20' Container	48	96	1,920' (585m)
40' Container	112	224	4,480' (1,365m)

hesco.com

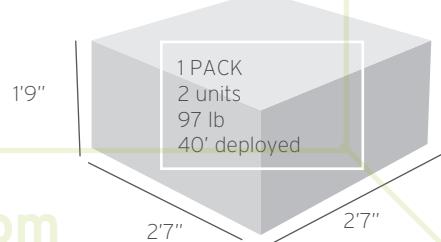

UK and Rest of World Inquiries

Hesco
Unit 41, Knowsthorpe Way,
Leeds LS9 0SW United Kingdom
Telephone: +44 113 248 6633

US and Americas Inquiries

Hesco
1199 North Fairfax Street, Suite 410,
Alexandria, Virginia 22314 United States
Telephone: +1 985-345-7332

Email: support@hesco.com

Disclaimer

The information contained in this document is intended solely to provide general guidance. The right is reserved to make changes to this document without notice at any time. Nothing in this document (i) constitutes an offer, representation, warranty, term or condition or (ii) is a substitute for the need to employ adequate independent technical expertise and judgment.

Patents and Trademarks

HESCO® products are subject to patents and/or patent applications in territories around the world. HESCO® is a registered trademark of Hesco Bastion Ltd and its affiliates ("Hesco") around the world. Other trademarks also apply.

For full details, please go to:
www.hesco.com/legal_notice

Quality Standards

Hesco operates a quality management system certified to ISO 9001:2008.
Approved Certificate number:
ISO9001-00008569

This material is subject to copyright protection.
Copyright © 2018 Hesco.
All rights reserved.

hesco.com